




YC600-BR

Microinverter


- Dual-module microinverter with independent MPPT per panel
- Utility interactive with Reactive Power Control (RPC)
- 600VA peak output power
- CA Rule 21 (UL 1741 SA) compliant
- Accommodates 60 & 72-cell PV modules up to 365W+

DIMENSIONS

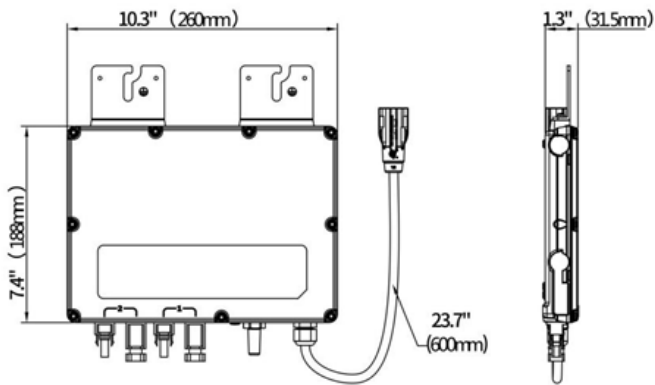

The YC600 is a dual-module, utility-interactive microinverter with Reactive Power Control (RPC) technology and Rule 21 grid support functionality. The first of its kind, the YC600 was designed to accommodate today's high output PV panels, offer enhanced capability and meet the latest grid compliance standards. Offering an unprecedented 300VA peak output power per channel, the YC600 works with 60 and 72-cell PV modules and offers dual, independent MPPT per panel. The YC600 also operates within a wider MPPT voltage range than competing brands for a greater energy harvest.

WIRING SCHEMATIC

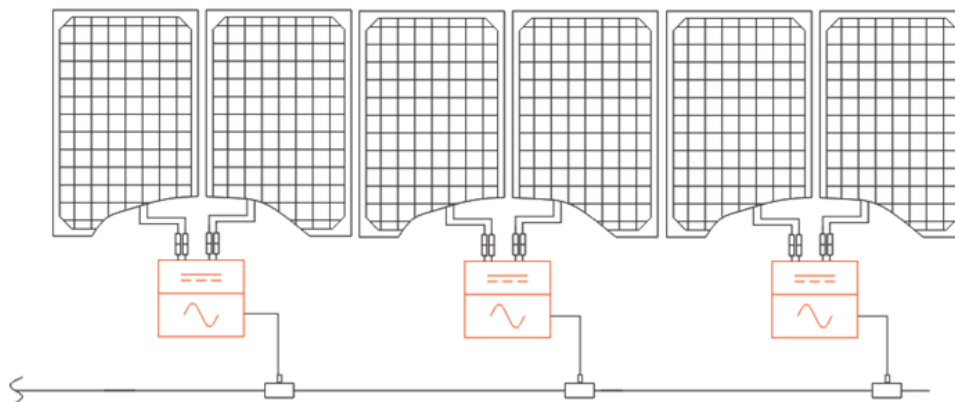

YC600 Microinverter Datasheet

Input Data (DC)

Recommended PV Module Power (STC)	250Wp-375Wp+
MPPT Voltage Range	22V-48V
Operation Voltage Range	16V-55V
Maximum Input Voltage	60V
Maximum Input Current	12A x 2
Maximum Input Short Circuit Current	13.2A

Output Data (AC)

Peak Output Power	600VA
Nominal Output Voltage/ Range	220V/176V-242V
Adjustable Output Voltage Range	160V-278V
Nominal Output Current	2.5A
Maximum Units Per Branch	8 (16PV Modules)
Nominal Output Frequency/ Range	60Hz/57.5Hz-62Hz
Adjustable Output Frequency Range	55.1Hz-64.9Hz
Power Factor (Adjustable)	0.8 Leading...0.8 Lagging
Total Harmonic Distortion	<3%
Maximum Output Overcurrent Protection	6.3A

Efficiency

Peak Efficiency	96.7%
CEC Efficiency	96.5%
Nominal MPPT Efficiency	99.5%
Night Power Consumption	60mW

Mechanical Data

Operating Ambient Temperature Range	-40 °F to +149 °F (-40 °C to +65 °C)
Storage Temperature Range	-40 °F to +185 °F (-40 °C to +85 °C)
Dimensions (W x H x D)	10.3" x 7.4" x 1.3" (260mm X 188mm X 31.5mm)
Weight	5.7lbs (2.6kg)
AC Bus Maximum Current	20A
Connector Type	MC4 Type or Customize
Cooling	Natural Convection - No Fans
Enclosure Environmental Rating	IP67

Features

Communication (Inverter To ECU)	Wireless
Transformer Design	High Frequency Transformers, Galvanically Isolated
Monitoring	Via EMA* Online Portal

Certificate&Compliance

Compliance	ABNT NBR 16149:2013, ABNT NBR 16150:2013
------------	--

* APsystems online Energy Management Analysis (EMA) platform

Specifications subject to change without notice
please ensure you are using the most recent update found at latam.APsistemas.com

3.8.19 © All Rights Reserved

APsystems en Guadalajara:

AV. Lazaro Cardenas 2850-5º Piso, Colonia Jardines del Bosque C.P. 44520, Guadalajara, Jalisco

+52 1 33 3188 4604 | 01 800 890 6030

info.latam@apsistemas.com | latam.APsistemas.com